




f.a.l.
The Light Masters

Sirio48


Sirio48拥有独特的设计风格, 它完全可以取代传统的照明产品。48pcs x 10W 4合1RGBW LED模块, 四个带密码保护状态的LCD按钮操作, 特制的超级巨大光学透镜, 配备调光曲线LED。外壳内部有温度监测使其工作更稳定, 它极大地提高了灯具效率, 使其达到最好的颜色效果和最大的光照强度, 非常适合用在专业舞台上、户外建筑、景观亮化等使用。

(LED019W)

RGB+WHITE

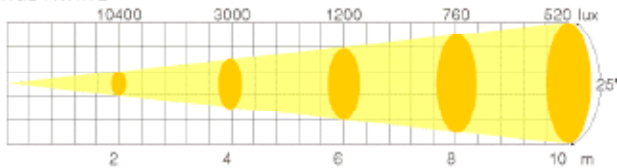

Item Light Source	Specification		Details
	LED	QTY	48x10W 4 in 1 LEDs
	Drive Current	500mA	
Electrical	Input Voltage		AC110V-240V, 50HZ- 60HZ
	Power Consumption		400W max
Control	On-board		Display for static
	DMX Channel		Arc1, Arc1+D, Arc2+D, Arc2+S, HSV, Stage (3CHS/4CHS/5CHS/6CHS/11CHS)
Optical System	Dimmer		0-100%
	Strobe		0-20Hz
	Beam Angle		10°, 25°, 50°
Physical	Dimensions		508*196*533 mm
	Weight		22kg
	Housing		Die-cast Aluminum
	Color		Black/ Grey
	Len Plate		Tempered Glass
	Fixture Connection		Data in/out, Power in/out
	Cooling		Convection
Certification And Safety	Certification		CE, ROHS
	Environment		Dry/Damp/Wet Location IP66
	Operation Temperatue		-40°C~ 50°C (operating) -20°C~50°C (startup)

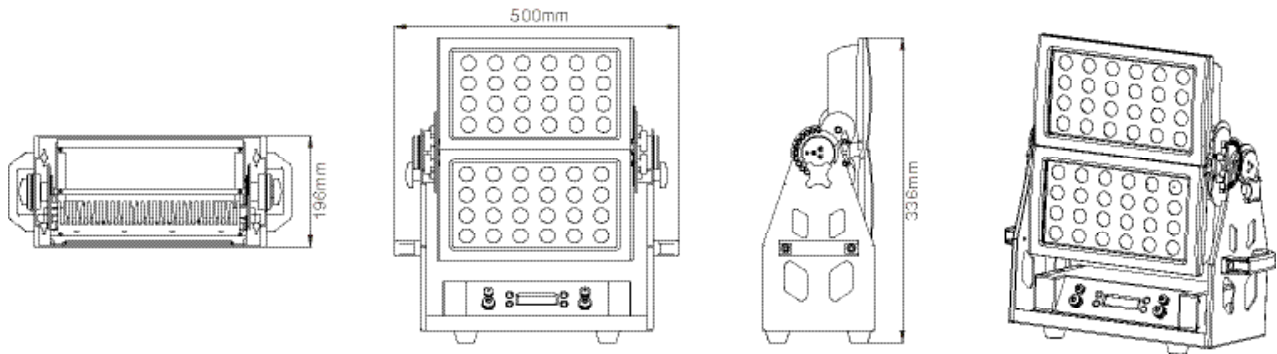

11-Channels:DMX512 **R** **G** **B** **W**

1	Dimming	000		255
2	Red	000		255
	STEP TIME	000	STEP TIME when (CUS.01-10) is activated	255
3	Green	000		255
	FADE TIME	000	FADE TIME when (CUS.01-10) is activated	255
4	Blue	000		255
5	White	000		255
6	Macro	000		255
7	Strobe	000	speed	20Hz
8	Auto	010 110	Auto Programs(1-10) Custom Prograsm(1-10)	109 255
9	Auto Speed	000	Auto speed	255
10	Dimming Speed	Fastst	Dimming speed	Slowest
11	ID	01	ID address selection	66

Outdoor Ip66

DMX512

LONGLIFE
L. E. D.
TECHNOLOGY

RGBW



f.a.l.
The Light Masters

广东省深圳市宝安区西乡九围先歌工业园 邮编: 518102
电话: 0755-29651037 传真: 0755-29651484 www.fal.it
内容如有更改, 恕不另行通知。IAG集团保留所有权利。FAL是IAG集团旗下品